

# A Series Four-Wheel High Level Order Picker

with capacities of 3,000lbs



**HANGCHA**

**HC FORKLIFT AMERICA CORPORATION**

**Company address:**

10405-A Granite Street  
Charlotte, NC 28273

Toll Free: (888) 652-8395

Phone: (980) 888-8335

Fax: (980) 888-8336

[america@hcforklift.com](mailto:america@hcforklift.com)

[www.hcforkliftamerica.com](http://www.hcforkliftamerica.com)



ISO9001:2015



ISO14001:2015

2021 VERSION / COPYRIGHT 2021

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

***Making Material Handling Easier***  
SINCE 1956



# A Series Four-Wheel High Level Order Picker

The A Series Four-Wheel High Level Order Picker is designed to meet order fulfillment needs in narrow aisle environments. This order picker has a comprehensive safety protection system, excellent ergonomics, and an advanced control system. Being reliable, comfortable, safe, and stable, all while providing excellent performance, it is the perfect choice for stock picking in a stereoscopic warehouse from 197" through 366" in height.

## NARROW- AISLE SOLUTIONS

### High Performance

- / The maximum full-load travel speed is 6.8mph. This allows for an increase in productivity.
- / The German ZF gearbox and German Schabmueller AC drive and steering motors provide performance, stability, and are reliable.
- / The AC hydraulic lifting system is highly efficient and maintenance-free.
- / The advanced CURTIS control system provides precise, smooth, and efficient control of the order picker.
- / CANBUS structure allows for the whole vehicle to communicate faster and more reliably.





## Comfort


- / As a part of the standard configuration, a height sensor is provided.
- / Shifting and lifting or lowering of the mast are buffered to enable more comfort.
- / CURTIS multi-function instruments include functions such as mode selection and wheel position. The instruments also clearly display various information about the order picker.

## Safety

- / The full-body harness provides protection for the operator.
- / A tilt switch sensor is provided to improve operational safety.
- / The left and right guardrails are equipped with safety switches.
- / The function of proportional speed reduction in corners is equipped as standard to ensure smooth and safe turning.
- / An emergency lowering feature is included standard. This operation can be carried out via the control platform or from the rear of the vehicle, respectively.

## Reliability

- / The vehicle's frame is robust and reliable thanks to its high-strength steel frame structure.
- / All of the order picker's wires and cables are protected. This greatly improves the reliability of the electrical system.
- / Switches, connectors, instruments, and other key parts are all high-quality products with excellent performance and quality.

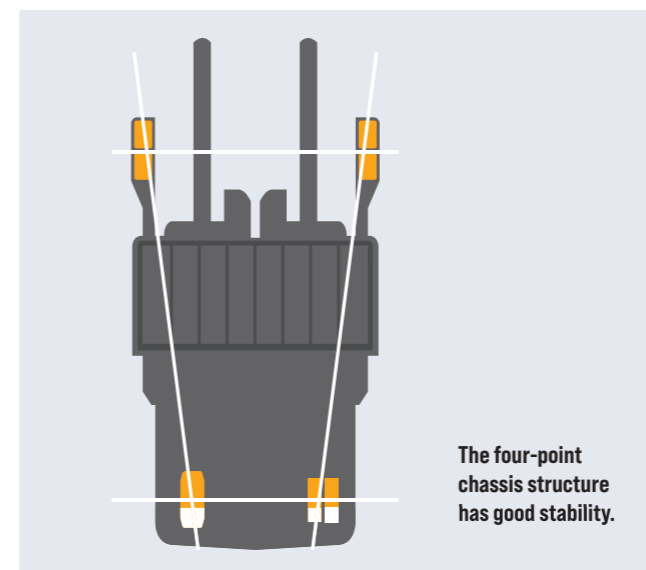

The A series lift truck provides operators with an unobstructed view. This contributes to an increase in the operator's confidence at height.



Fully variable lift/lower speeds provide precise control.



LORD steering gear with torque feedback is provided to enable higher operating safety and operator comfort.



With a safety factor of 10, the mast chain is equipped with a chain safety switch.



The manual-locking pallet clamp works on a wide range of pallets. It also accommodates pallet stringers ranging from 1" to 2" so operators can safely handle any size pallet.

## Maintenance

- / The brushless AC motor is maintenance-free. This saves the end-user time and money.
- / The integrated power display, timing, and fault self-diagnosis meter are convenient for maintenance.
- / The rear hood can be easily removed without tools. This is convenient for maintenance of the hydraulic unit, electric control, motor, and other parts.


## Standard Specification

- / 36V Electrical System
- / ZF Drive Unit
- / INTORQ Electromagnetic Brake
- / LORD Steering Gear
- / CURTIS AC Motor Controller
- / CURTIS Multi-Function Instrument
- / Chain Switch
- / Reflective Mirror
- / LED Ceiling Light
- / LED Side Light
- / Emergency Cut Off Switch
- / Alarm Light
- / Height Sensor
- / Safety Pedal
- / Tilt Switch
- / Left and Right Guard Rail
- / Guard Rail Switch
- / Electrostatic Belt
- / Electromagnetic Brake
- / Full Body Harness and Energy-Absorbing Tether
- / Pallet Clamp
- / Fully Variable Lift/Lower Controls
- / Manual Emergency Lowering System
- / Work Material Storage Compartments
- / Cushioned Mast Stops
- / Cushioned Mast Staging
- / Automatic Return to Center Drive Wheel Upon Start-Up
- / Electronic Power Steering
- / Battery Compartment Rollers



## Optional Equipment

- / Side Roller
- / Blue Light
- / Head Lamp
- / Wire Mesh Screen

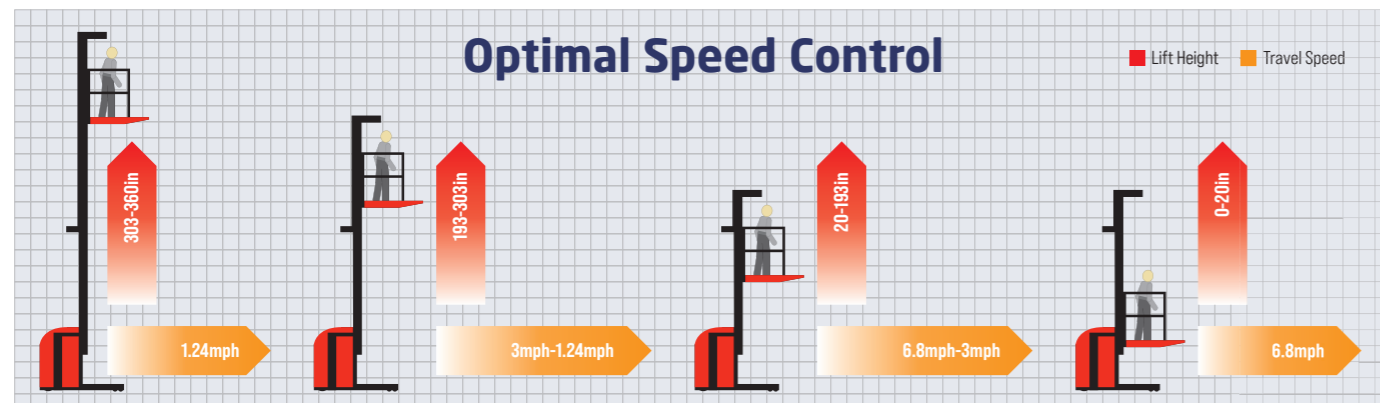

The A series order picker is available with advanced intellispeed system, which smoothly coordinates travel speeds and load height. Compared to conventional speed control, intellispeed maximizes truck speed as the platform rises, capitalizing on an area of opportunity for providing faster travel between picks.



# A Series Four-Wheel High Level Order Picker Specification



Distinguishing Marks	Manufacturer	HANGCHA GROUP CO.,LTD.	
	HCFA Model	OPH13	
	Model	CJD13-AC2S-HNA	
	Drive: electric (battery or mains),diesel,petrol,fuel gas	Electric	
	Operator Type: hand,pedestrian,standing,seated,order-picker	Order Picker	
	Rated Capacity/Rated Load	Q(lb/kg)	3000/1360
	Load Centre Distance	c(in/mm)	24/600
	Wheelbase	y(in/mm)	87.5/2222
Weight	Service Weight (without battery)	See table 1	
Tires & Chassis	Tires: solid rubber, superelastic, pneumatic, polyurethane	Polyurethane	
	Tire Size, front	in/mm	Ø13.5×5.5 Ø343×140
	Tire Size, rear	in/mm	Ø6×4 Ø150×100
	Wheels, number front/rear (× = driven wheels)	1x,1/4	
Dimensions	Height, mast lowered	See table 1	
	Lift	See table 1	
	Height, mast extended	See table 1	
	Height of Overhead Guard (cabin)	h <sub>6</sub> (in/mm)	92.3/2345
	Standing Height	h <sub>7</sub> (in/mm)	10/253
	Height, lowered	h <sub>3</sub> (in/mm)	3/75
	Overall Length	l <sub>1</sub> (in/mm)	123.7/3142
	Overall Width	See table 1	
	Fork Dimensions DIN ISO 2331	s/e/l(in/mm)	2/4/48 50/100/1220
	Width Across Forks	b <sub>5</sub> (in/mm)	24-30/610-760
Ground Clearance, centre of wheelbase	m <sub>2</sub> (in/mm)	2/50	
Turning Radius	W <sub>a</sub> (in/mm)	98.5/2500	
Performance Data	Travel Speed, laden/unladen	See table 2	
	Lift Speed, laden/unladen	fpm mm/s	67/74.9 340/380
	Lowering Speed,laden/unladen	fpm mm/s	86.7/80.8 440/410
	Gradeability, laden/unladen	%	5/10
	Service Brake	Electromagnetic	
Electric Motor	Drive Motor Rating S2 60 min	hp/kw	8.6/6.4
	Lift Motor Rating at S3 15 %	hp/kw	17.2/12.8
	Battery Voltage/Nominal Capacity K5	V/Ah	36/600
	Battery Size	in/mm	38.44×14.25×31 976×362×787
	Battery Weight	lb/kg	1730/785
Additional Data	Sound Pressure Level at the Driver's Seat	dB(A)	69

**Table 1**

	Lift	Height, Mast Lowered	Height, Mast Extended	Stand Height, Elevated	Service Weight (without battery)	Overall Width
	h <sub>3</sub> (in/mm)	h <sub>1</sub> (in/mm)	h <sub>4</sub> (in/mm)	h <sub>2</sub> (in/mm)	lb/kg	b <sub>1</sub> /b <sub>2</sub> (in/mm)
N5000	197/5000	100/2540	289/7345	206.7/5250	6938/3150	48.4/49.2 1230/1250
N6100	240/6100	114.4/2905	332.5/8445	250/6350	7191.6/3265	48.4/60 1230/1525
N7000	275.5/7000	126.2/3205	368/9345	285.4/7250	7412/3365	48.4/60 1230/1525
N8000	315/8000	139.4/3540	407.3/10345	324.8/8250	7643.2/3470	48.4/68 1230/1800
N9300	366/9300	156.3/3970	458.5/11645	376/9550	7940.5/3605	48.4/68 1230/1800

**Table 2**

Lift Height h <sub>3</sub> in(mm)	Travel Speed in mph(km/h)
0-20(0-500)	6.8(11)
20-193(500-4900)	6.8-3(11-4.8)
193-303(4900-7700)	3-1.24(4.8-2)
303-366(7700-9300)	1.24(2)

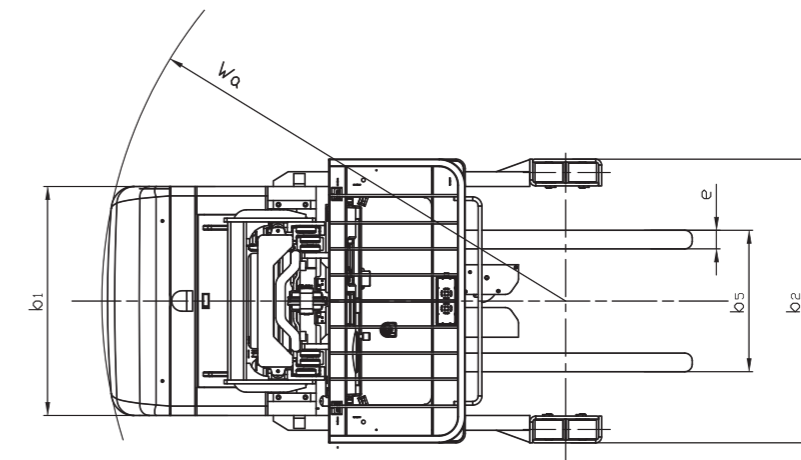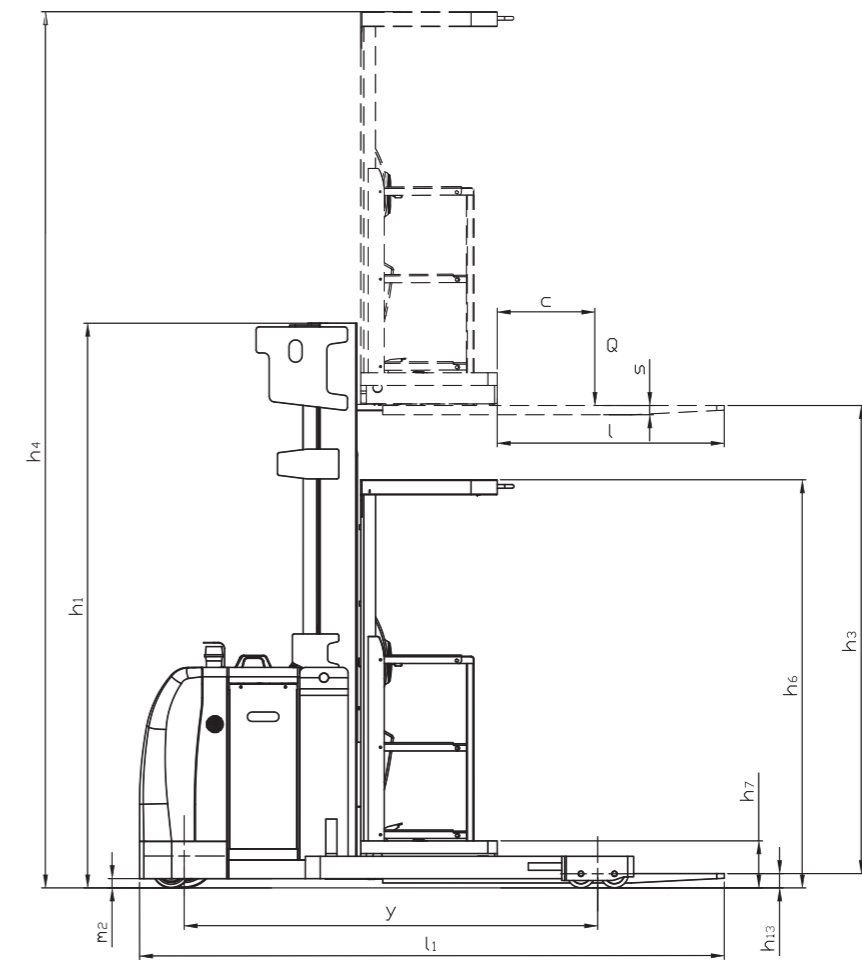

CJD13-AC2S-HNA

